

01/10/00

1-535 U.S. PTO

+

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C14165

First Named Inventor or Application Identifier

HIDETOSHI WADA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 523. ☒ Drawing(s) (35 USC 113) Total Sheets 104. ☒ Oath or Declaration Total Pages 2a. ☐ Newly executed (original or copy)b. ☒ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ DELETION OF INVENTOR(S)Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. /

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label05514
(Insert Customer No. or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		21-20 =	1	X \$ 18.00 =	\$ 18.00
INDEPENDENT CLAIMS (37 CFR 1.16(b))		5-3 =	2	X \$ 78.00 =	\$ 156.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
Total of above Calculations =					\$ 864.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$ 864.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 864.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.


22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME Anthony M. Zupcic (Reg. No. 27,276)

SIGNATURE



DATE

January 7, 2000

IMAGE COMMUNICATION APPARATUS, METHOD AND SYSTEM

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to an image communication apparatus, method and system, and more particularly to techniques of wireless (radio) transmission of digital image information picked up and stored by an electronic apparatus having an image
10 pickup unit, to another recording device which records the received digital image information.

Related Background Art

 An image pickup device (such as an electronic still image camera) for picking up still images has
15 generally a recording medium having a small capacity. For example, the recording medium is a semiconductor memory such as an SRAM and a flash memory or a magnetic recording medium such as a floppy disk. An image
20 pickup device (such as a camera integrated VTR) for picking up moving images stores the images in a recording medium such as a magnetic tape. Image data picked up and stored by such an image pickup device can be reproduced by utilizing an image reproduction function of the image pickup device itself.

25 In order to edit, modify and print image data, it is necessary to store the image data picked up by the image pickup device in a recording device (such as a

storage unit) having a recording medium of a large capacity and to thereafter process the stored image data by using a personal computer or the like.

5 In such a case, a user is required to connect the image pickup device and recording device with a cable or infrared transceivers.

10 If a cable is used for such connection, the distance between the image pickup device and recording device is limited by the length of the cable. If the cable is short, the image pickup device and recording device are required to be set near to each other. If infrared transceivers or the like are used for such connection, an occurrence frequency of transmission errors may become high depending upon the communication state of a transmission path, and reliable data
15 communication may become impossible.

In order to transfer image data picked up by the image pickup device to the recording device, a user is required to manually perform all operations from
20 selection of image data to transfer thereof. The user operations therefore become complicated.

It is also necessary for the user to manually perform all operations including deletion of image data on the side of the image pickup device, after the data
25 picked up by the image pickup device is stored in the recording device. The user operations therefore become complicated.

SUMMARY OF THE INVENTION

An object of the present invention is to solve the above-described problems.

Another object of the invention is to provide
5 techniques allowing an image communication apparatus, method and system to efficiently and reliably record and store image data (information) picked up by an image pickup device in a remote recording device.

As a preferred embodiment for such objects, the
10 invention discloses an image communication apparatus which comprises: (a) an image pickup unit for generating digital image; (b) a recording unit for recording the digital image and list information corresponding to the digital image, in a recording
15 medium; and (c) a transmitting unit for executing wireless (radio) transmission of the digital image and list information recorded in the recording medium to an external apparatus, wherein the image communication apparatus has a mode of automatically executing
20 wireless (radio) transmission of the digital image and list information recorded in the recording medium, in accordance with a communication state with the external apparatus.

As another preferred embodiment, the invention
25 discloses an image communication apparatus which comprises: (a) a receiving unit for receiving list information supplied from an external apparatus through

wireless transmission; (b) a recording unit for recording the list information; (c) a comparing unit for comparing the list information with other list information recorded by the recording unit; and (d) a
5 control unit for remotely controlling image information corresponding to the list information in accordance with a comparison result by the comparing unit.

As another preferred embodiment, the invention discloses an image communication method which comprises
10 the steps of: (a) generating digital image by using an image pickup unit; (b) recording the digital image and list information corresponding to the digital image, in a recording medium; and (c) controlling a mode of automatically executing wireless transmission of the
15 digital image and list information recorded in the recording medium to an external apparatus, in accordance with a communication state with the external apparatus.

As another preferred embodiment, the invention discloses an image communication method which comprises
20 the steps of: (a) receiving list information supplied from an external apparatus through wireless transmission; (b) recording the list information; (c) comparing the list information with other list
25 information recorded at the recording step; and (d) remotely controlling image information corresponding to the list information in accordance with a comparison

result at the comparing step.

As another preferred embodiment, the invention discloses an image communication system which comprises: (a) an image generating apparatus for
5 recording digital image and list information corresponding to the digital image generated by an image pickup unit, in a first recording unit; and (b) a recording apparatus for recording the digital image supplied from the image generating apparatus through
10 wireless transmission, in a second recording medium, wherein: the image generating apparatus is provided with a first mode of automatically executing wireless transmission of the list information recorded in the first recording medium, depending upon a communication
15 state with the recording apparatus; and the recording apparatus is provided with a second mode of receiving the list information supplied from the image generating apparatus through wireless transmission and remotely controlling the digital image corresponding to the list
20 information.

Still other objects of the present invention, and the advantages thereof, will become fully apparent from the following detailed description of the embodiments.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing an example of an image communication system according to an embodiment

of the invention.

Fig. 2 is a block diagram showing an example of an image pickup device according to the embodiment.

Fig. 3 is a block diagram showing an example of a recording device according to the embodiment.

Fig. 4 which is composed of Figs. 4A and 4B are flow charts illustrating an example of a process sequence to be executed by the image pickup device of the embodiment.

Fig. 5 is a flow chart illustrating an example of a process sequence to be executed by the recording device of the embodiment.

Fig. 6 is a block diagram showing another example of the image pickup device according to a second embodiment of the invention.

Fig. 7 which is composed of Figs. 7A and 7B are flow charts illustrating another example of the process sequence to be executed by the image pickup device of the second embodiment.

Fig. 8 is a diagram showing an example of a data list according to the embodiments.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiments of the present invention will now be described in detail hereinafter with reference to the accompanying drawings.

First Embodiment

An image communication system of the first embodiment has two image pickup devices 100 and a recording device 200. The image pickup device 100 digitalizes picked-up images (either still images or moving images) and stores them. For example, the image pickup device 100 is a camera integrated VTR or a digital camera. The recording device 200 has a recording medium of a large capacity connectable to a personal computer, an image editing apparatus or the like, and may be a storage unit, a home server or the like. The image pickup devices 100 and recording device 200 can be set at remote locations for wireless communications.

Each image pickup device 100 is set at a normally communicatable distance from the recording device 200. The image pickup device 200 has an operation mode of automatically performing wireless transmission of record data (including video and audio data) picked up and stored in the past by the device 200 to the recording device 200 at the remote site, if the communication state of a transmission path is good. The recording device 200 has an operation mode of recording and storing record data (including video and audio data) automatically wireless-transmitted from each image pickup device 100. These operation modes are simply called an "automatic transmission mode", hereinafter.

For example, if the automatic transmission mode is ON at the image pickup devices A100 and B100 and at the recording device 200 shown in Fig. 1, the following operations are executed. Since the image pickup device
5 A100 and recording device 200 are set in the communicatable area, they start executing wireless transmission if the communication state of the transmission path is good. On the other hand, since the image pickup device B100 and recording device 200
10 are not set in the communicatable area, they operate independently even if the communication state of the transmission path is good.

The structure and operation of the image communication system of the first embodiment will be
15 described in detail with reference to the accompanying drawings.

Fig. 2 is a block diagram showing the structure of the image pickup device 100 of the first embodiment. Each component of the image pickup device will be
20 described below.

Referring to Fig. 2, an image pickup unit 1 has image pickup elements such as a CCD. The image pickup unit 1 picks up the optical image of an object and generates image signals of a predetermined format. The
25 image pickup unit 1 picks up and outputs not only still image signals but also moving image signals. A digital image processing unit 2 digitalizes image signals to

perform high efficiency encoding. For example, the digital image processing unit 2 compression-encodes picked-up still images in accordance with JPEG, whereas it compression-encodes picked-up moving images in accordance with MPEG.

A microphone 3 converts external sounds into electric signals. A digital audio processing unit 4 digitalizes audio signals to perform high efficiency encoding.

10 An index information generating unit 5 automatically generates unique index information corresponding to video and audio information each time a user starts picking up images. This index information is stored as a data list in a recording medium 10 in a predetermined record area. An example of the structure of the data list is shown in Fig. 8.

In Fig. 8, reference numeral 801 represents a field in which index numbers for identifying the index information are stored, reference numeral 802 represents a field in which titles input in advance from an operating unit 13 are stored, and reference numeral 803 represents a field in which date and time when each image is picked up are stored. Reference numeral 804 represents a field in which the name of each image data file is stored, and reference numeral 805 represents a field in which the name of each audio data file is stored. The fields 804 and 805 store the

extension of each data file so that the data format and data type (still image or moving image) of each data file can be discriminated. Reference numeral 806 represents a field in which a transmission end flag to be described later is stored, reference numeral 807 represents a field in which a reproduction skipping flag to be described later is stored, and reference numeral 808 represents a field in which a data deleting flag to be described later is stored. Reference numeral 809 represents a field in which an index number of other index information is set. With this field 809, a link to other list information can be recognized.

A recording/reproducing unit 6 stores digital video data and digital audio data in the recording medium (such as a magnetic tape and a magnetic disc) 10, in correspondence with the list information, and reads the video and audio data from the recording medium 10. The digital video and audio data is stored as one or a plurality of files. For example, the digital video and audio data of MPEG is stored in the same file, whereas the digital video and audio data of JPEG is stored in different files.

A control unit 7 controls the whole operation of the image pickup device 100. The operation of controlling the recording/reproducing unit 6 will be later described. The control unit 7 reads program

codes prestored in a memory 11 to control the whole operation of the image pickup device 100.

A wireless communicating unit 8 generates transmission data in accordance with the list
5 information and corresponding digital video and audio data (hereinafter simply called record data), modulates the transmission data, for example, through spread spectrum, and thereafter wireless-transmits it to the remote recording device 200 via an antenna 9. The
10 wireless communicating unit 8 also wireless-transmits the data list in the image pickup device 100 in the form of the transmission data. The wireless communication unit 8 spread-spectrum-modulates the transmission data through code division multiplex so
15 that data communication can be realized at a high transmission rate.

The wireless communication unit 8 has a detection circuit 12 for detecting whether or not the distance to the recording device 200 is in a normally
20 communicatable range and whether or not the communication state of the transmission path is good. The detection results of the detection circuit 12 are supplied as communication state signals to the control unit 7. The wireless communicating unit 8 also
25 receives the data list (set with the reproduction skipping flag and data deleting flag) and control signals returned from the remote recording device 200,

and supplies them to the control unit 7.

The operating unit 13 is used for notifying an image pickup request, an ON/OFF of the automatic transmission mode or other operations, to the control unit 7 and the like.

Although the image pickup device 100 of the first embodiment wireless-transmits transmission data via the antenna 9, the invention is not limited only thereto. For example, the transmission data may be transmitted via an infrared LED or a laser diode by modulating the transmission data with an infrared ray or a laser beam.

Fig. 3 is a block diagram showing the structure of the recording device 200 of the first embodiment. Each component of the recording device 200 will be described below.

Referring to Fig. 3, a wireless communicating unit 21 demodulates transmission data received at an antenna 20 and wireless-transmits the data list (set with the reproduction skipping flag or data deleting flag) of the image pickup device 100 at the remote site and control signals, to the image pickup device 100.

A record information detecting unit 22 detects the data list and index information corresponding to each record data from the signal received and demodulated by the wireless communicating unit 21. A record processing unit 23 recognizes the data format and data type of each record data in accordance with the index

information of the record data. If it is set so that the record data is stored after the data format thereof is converted into a predetermined data format, the record processing unit 23 converts the received record data into the predetermined format.

It is assumed, for example, that the predetermined format is MPEG and the data format of the received record data is JPEG. In this case, the record processing unit 23 converts the record data of JPEG into the format of MPEG. If the received record data is MPEG, the record processing unit 23 uses the received data without data format conversion. Since still and moving image data is stored by using the same data format, the image processing (such as editing, modifying and synthesizing) after the record data is stored can be simplified. The predetermined data format is not limited only to MPEG, but other data formats may also be used.

A control unit 24 reads program codes prestored in a memory 28 and controls the whole operation of the recording device 200.

A recording/reproducing unit 25 stores each list information of the data list and each record data in a recording medium (such as a magnetic tape and a magnetic disc) 27 in correspondence with the list information, and reads the stored information from the recording medium 27. The data list in the recording

device 200 is generated for each image pickup device 100 and stores in the recording medium in a predetermined record area.

5 A list information comparing unit 26 compares the data list transmitted from the image pickup device 100 with the data list stored in the recording medium 27, to thereby check whether there is list information having the coincident contents.

10 An operating unit 29 notifies the control unit 24 of a deletion request, an ON/OFF of the automatic transmission mode, setting of the data format to be automatically used for data format conversion (MPEG in this embodiment) or the like.

15 Although the recording device 200 of the first embodiment receives the record data via the antenna 20, the invention is not limited only thereto. For example, record data modulated with an infrared ray or a laser beam may be received via an infrared LED or a laser diode.

20 The structures of the image pickup device 100 and recording device 200 of the first embodiment have been described above.

25 Next, the operations of the image pickup device 100 and recording device 200 of the first embodiment will be described in detail.

First, the operation of the image pickup device 100 will be described. If the automatic transmission

mode is OFF, the image pickup device 100 operates in a normal operating mode. In this mode, the image pickup device 100 does not use the wireless communication with the recording device 200, but operates independently.

5 This normal operating mode includes an image pickup mode and a reproduction mode. In the image pickup mode, in response to a presence/absence of an "image pickup request" from a user, still or moving images are picked up and stored together with audio data in the
10 recording medium 10. In the reproduction mode, video and audio data stored in the recording medium 10 is read and reproduced.

Next, the operation to be executed when the automatic transmission mode is ON will be described.

15 Also in this mode, the image pickup device 100 can use the image pickup mode and reproduction mode. However, if the "image pickup request" or the like is not entered during a predetermined time duration, the image pickup device 100 executes the following operation.

20 It is checked at a predetermined timing interval whether the wireless communicating unit 8 of the image pickup device 100 and the wireless communicating unit 21 of the recording device 200 are in the normally communicatable range and whether the communication
25 state of the transmission path is good, to thereby judge whether both the wireless communication units can communicate each other.

First, the case (1) that it is judged as communicatable will be described. In this case, the image pickup device 100 automatically controls to execute wireless transmission of record data.

5 In this case, the wireless communicating unit 8 of the image pickup device 100 supplies the control unit 7 with a communication state signal representative of "communicatable". Under the control of the control unit 7, the recording/reproducing unit 6 reads the
10 record data from the recording medium 10. The record data read from the recording/reproducing unit 6 is modulated (e.g., spread-spectrum modulation) by the wireless communicating unit 8 and wireless-transmitted to the recording device 200 via the antenna 9.

15 Similarly, the wireless communicating unit 21 of the recording device 200 supplies the control unit 24 with a communication state signal representative of "communicatable". The control unit 24 controls the
20 recording/reproducing unit 25 to prepare for recording the record data.

 Next, the case (2) that it is judged that good wireless communication cannot be obtained because of relocation of the image pickup device 100 or recording device 200 or obstacles on the transmission path, will
25 be described. In this case, the image pickup device 100 automatically controls not to execute wireless transmission of record data.

In this case, the wireless communicating unit 8 of the image pickup device 100 supplies the control unit 7 with a communication state signal representative of "not communicatable". Under the control of the control
5 unit 7, the recording/reproducing unit 6 stops reproducing the record data. The record data intermediately stopped its reproduction is reproduced when the communicatable state becomes good.

Similarly, the wireless communicating unit 21 of
10 the recording device 200 supplies the control unit 24 with a communication state signal representative of "not communicatable". Under the control of the control unit 24, the recording/reproducing unit 25 stops recording received data. Then, the control unit 24
15 deletes the received data intermediately stopped its record and controls so as to receive the data from the start thereof.

Next, the case (3) that it is judged as communicatable because the bad communication state
20 changed to the good communication state, will be described. In this case, the image pickup device 100 automatically resumes execution of wireless transmission of record data.

In this case, the wireless communicating unit 8 of
25 the image pickup device 100 supplies the control unit 7 with a communication state signal representative of "communication recovery". Under the control of the

control unit 7, the recording/reproducing unit 6 resumes the reproduction of the record data. In this case, the recording/reproducing unit 6 resumes the reproduction in the unit of data corresponding to the list information. Therefore, if reproduction of the data corresponding to some list information is intermediately stopped, the data is reproduced from the start thereof.

Similarly, the wireless communicating unit 21 of the recording device 200 supplies the control unit 24 with a communication state signal representative of "communication recovery". Under the control of the control unit 24, the recording/reproducing unit 25 resumes recording the received data. In this case, the recording/reproducing unit 25 records the received data in the unit of data corresponding to the list information. Therefore, if recording the data corresponding to some list information is intermediately stopped, the data is recorded from the start thereof.

The processes of the cases (1) to (3) are executed until all record data in the recording medium 10 is recorded in the recording medium 27. After all the record data is transmitted, the image pickup device 100 executes wireless transmission of a data end signal to the recording device. After the data end signal is received, the recording device 200 stops its recording

operation. As a user records new picked-up images, the above-described processes automatically start.

Next, the operation of the recording device 200 will be described. If the automatic transmission mode is OFF, the recording device 200 operates in the normal operating mode. In this case, the recording device 200 operates independently without executing wireless communication with the image pickup device 100. On the other hand, if the automatic transmission mode is ON, the recording device 200 performs the following operation.

Upon reception of the data list of the image pickup device 100, the recording device 200 supplies the received data list to the list information comparing unit 26. The list information comparing unit 26 compares the data list of the image pickup device 100 with the data list of the recording device 200 to judge whether there is list information having the coincident contents.

First, the case (4) that a user does not issue "deletion request" in advance, will be described. If there is list information having the coincident contents, the control unit 24 sets the reproduction skipping flag to the field 807 of the data list of the image pickup device 100 corresponding to the list information. The reproduction skipping flag is not set for the list information having different contents.

After the process is performed for all list information in the data list of the image pickup device 100, the list information comparing unit 26 returns the data list (with the reproduction skipping flag being
5 set) of the image pickup device 100 back to the image pickup device 100 via the control unit 24 and wireless communicating unit 21.

In accordance with the returned data list, the image pickup device 100 skips the reproduction of the
10 record data with the set reproduction skipping flag, and executes wireless transmission of other record data. It is therefore possible to prevent the image pickup device 100 from again transmitting the record data already recorded by the recording device 200, and
15 to automatically execute wireless transmission of other record data.

Next, the case (5) that a user issues "deletion request" in advance, will be described. If there is list information having the coincident contents, the
20 control unit 24 sets the data deleting flag to the field 808 of the data list of the image pickup device 100 corresponding to the list information. The data deleting flag is not set for the list information having different contents. After the process is
25 performed for all list information in the data list of the image pickup device 100, the list information comparing unit 26 returns the data list (with the data

deleting flag being set) of the image pickup device 100 back to the image pickup device 100 via the control unit 24 and wireless communicating unit 21.

5 In accordance with the returned data list, the image pickup device 100 deletes the record data with the set data deleting flag, and executes wireless transmission of other record data. It is therefore possible to prevent the image pickup device 100 from again transmitting the record data already recorded by
10 the recording device 200, and to automatically execute wireless transmission of other record data. Since the record data in the image pickup device 100 can be automatically deleted, it is possible to prevent a cumbersome operation of replacing the recording medium
15 of the image pickup device 100 by another recording medium, and to efficiently use one recording medium.

Figs. 4A and 4B are flow charts illustrating the operation sequence to be executed by the image pickup device 100 of the first embodiment. The control unit 7
20 of the image pickup device 100 controls the whole operation of the image pickup device 100 in accordance with the flow charts of Figs. 4A and 4B. Program codes for realizing the flow charts of Figs. 4A and 4B are being stored in the memory 11.

25 At Step S401 the control unit 7 judges whether the automatic transmission mode is ON. If not, the control unit 7 enters the normal operating mode (S419).

If the automatic transmission mode is ON, the control unit 7 judges at Step S402 whether there is an image pickup request from a user. If not, the control unit 7 judges at Step S403 whether the recording/reproducing unit 6 is in a recording/reproducing status. If not, the control unit 7 judges at Step S404 whether there is an input from a user during the predetermined time duration.

If there is no input from a user during the predetermined time duration, the control unit 7 judges at Step S405 from the communication state signal output from the wireless communicating unit 8 whether the communication state is communicatable. If it is judged as communicatable, the control unit 7 executes at Step S406 wireless transmission of the data list stored in the recording medium 10 to the recording device 200. In this case, the list information already set with the transmission end flag is not transmitted. The recording device 200 compares the received data list with the data list managed by the recording device 200. If there is list information having the coincident contents, the reproduction skipping flag or data deleting flag is set to the list information. After the process is executed for all list information in the data list, the recording device 200 returns the data list back to the image pickup device 100.

In accordance with the data list returned from the

recording device 200, the image pickup device 100 judges whether wireless transmission of the record data corresponding to list information can be executed. Reproducing the record data corresponding to the list
5 information with the set reproduction skipping flag is skipped, and the transmission end flag is set to the field 806 of the list information (S407, S417).

For the list information with the set data deleting flag, the list information and the record data
10 corresponding to the list information are deleted (S408, S418).

For the list information set with neither the reproduction skipping flag nor the data deleting flag, wireless transmission of the record data corresponding
15 to the list information to the recording device 200 is executed. If the recording device 200 confirms that the record data is normally received, the control unit 7 sets the transmission end flag to the field 806 of the list information (or deletes the record data), and
20 executes the process for the next list information. If the recording device 200 cannot confirm that the record data is normally received, the control unit 7 executes again wireless transmission of the record data (S409).

At Step S410, the control unit 7 repeats the
25 processes at Step S405 and succeeding Steps until the transmission end flag is set to the fields 806 of all list information in the data list (or until all record

data is deleted). After transmission of all record data is completed, the image pickup device 100 transmits a data end signal to the recording device 200 to thereafter return to Step S401.

5 Next, the case that it is judged at Step S402 that there is an image pickup request, will be described. In this case, the control unit 7 judges at Step S411 whether the recording/reproducing unit 6 is in the reproducing status. If in the reproducing status, the
10 recording/reproducing unit 6 stops the reproducing operation at Step S412. At Step S413 the recording/reproducing unit 6 records the new picked-up image together with the list information in the vacant area of the recording medium 10. After the picked-up
15 image is stored, the control unit 7 returns to the control Step S402.

 Next, the case that it is judged at Step S403 that the recording/reproducing unit 6 is in the recording or reproducing status, will be described. In this case,
20 the recording/reproducing unit 6 continues the recording or reproducing operation at Step S414. After the recording or reproducing is completed, the control unit 7 returns to the control Step S402.

 Next, the case that it is judged at Step S405 that
25 the communication state between the image pickup device 100 and recording device 200 is not communicatable, will be described. In this case, the control unit 7

judges at Step S415 whether there is record data presently under wireless transmission. If there is no record data presently under wireless transmission, the control unit 7 returns to the control Step S405.

5 If there is record data presently under wireless transmission, at Step S416 the control unit 7 stops the wireless transmission of the control data and sets a reproduction pointer of the recording/reproducing unit 6 to the start position of the record data.

10 Fig. 5 is a flow chart illustrating the operation sequence to be executed by the recording device 200 of the first embodiment. The control unit 24 of the recording device 200 controls the whole operation of the recording device 200 in accordance with the flow
15 chart of Fig. 5. Program codes for realizing the flow chart of Fig. 5 are being stored in the memory 28.

 At Step S501 the control unit 24 judges whether the automatic transmission mode is ON. If not, the control unit 24 enters the normal operating mode
20 (S409). In this case, the recording device 200 accepts a control from an external apparatus (such as a personal computer and an editing apparatus) to edit and modify the already recorded information.

 If the automatic transmission mode is ON, the
25 control unit 24 reads the data list from the recording medium 27 and supplies it to the list information comparing unit 26.

Next, the control unit 24 judges at Step S503 from the communication state signal output from the wireless communicating unit 21 whether the communication state is communicatable. If it is judged that the communication state is communicatable, at Step S504 the control unit 24 receives the data list wireless-transmitted from the image pickup device 100 and supplies it to the list information comparing unit 26. At Step S505 the list information comparing unit 26 compares the list information contained in the data list of the image pickup device 100 with the list information contained in the data list of the recording device 200 to thereby judge whether the contents thereof are coincident.

15 If the data list of the recording device 200 contains the list information having the same contents, the control unit 24 judges at Step S506 whether the deleting request is already set. If already set, the control unit 24 sets the data deleting flag to the list information of the image pickup device 100 (S507). If the deleting request is not already set, the control unit 24 sets the reproduction skipping flag to the list information of the image pickup device 100 (S508).

25 After the process is completed for all list information contained in the data list of the image pickup device 100, at Step S510 the recording device 200 returns the data list of the image pickup device

100 back to the image pickup device 100. At Step S511 the recording device 200 receives the record data and list information sequentially wireless-transmitted from the image pickup device 100 and stores them in the recording medium 27. The data list of the recording device 200 is therefore updated. Each time the record data is normally stored, the recording device 200 transmits a record confirmation signal representative of a normal record completion to the image pickup device 100.

Until the recording device 200 eventually receives the data end signal from the image pickup device 100, it executes Step S503 and succeeding Steps (S512). When the recording device 200 receives the data end signal from the image pickup device 100, at Step S513 the control unit 24 stops the recording operation of the recording/reproducing unit 25 to thereafter return to the control Step S501.

Next, the case that it is judged at Step S503 that the communication state between the image pickup device 100 and recording device 200 is not communicatable, will be described. In this case, the control unit 24 judges at Step S514 whether there is record data under reception. If not, the control unit 24 returns to the control Step S502.

If there is record data under reception, at Step S515 the control unit 24 stops recording the record

data and sets the pointer of the recording/reproducing unit 25 to the start of the record data.

As described above, in the first embodiment, each image pickup device 100 and recording device 200 are provided with the automatic transmission mode. Therefore, the image communication system is realized which can automatically execute wireless transmission of digital video and audio data picked up and recorded in the past with the image pickup device 100 to the remote recording device 200, if the distance between the image pickup device 100 and recording unit 200 is in a normally communicatable range and if the communication state of the transmission path is good. Furthermore, this system can automatically stop data transmission if each device is not in the normally communicatable range or if the communication state of the transmission path is not good, and after the communication state becomes good, the system automatically resumes the data transmission.

With this configuration, it is possible to automatically store digital video and audio data picked up by the image pickup device 100 in the recording medium of the remote recording device 200, without particular attention of a user and a complicated work. Further, since the data transmission is automatically stopped if the communication state is not good, transmission errors and data loss can be minimized and

the data can be recorded and stored reliably at the remote recording device 200.

Also in the first embodiment, reproduction of digital video and audio data already recorded in the recording device 200 can be automatically skipped. With this configuration, it is possible to prevent the same data from being duplicately reproduced and transmitted. The data transmission can therefore be executed efficiently.

Still also in the first embodiment, digital video and audio data already recorded in the recording device 200 can be automatically deleted. With this configuration, it is possible to prevent the same data from being duplicately reproduced and transmitted. The data transmission can therefore be executed efficiently. The recording medium of the image pickup device 100 can therefore be used efficiently.

Also in the first embodiment, it is possible to convert digital video data transmitted from the image pickup device 100 into a predetermined data format and to store it in the recording device 200. With this configuration, a work load of storage and maintenance of digital video data can be reduced and a work load of edition after recording can be reduced.

Second Embodiment

In the first embodiment, if the image pickup device 100 is neither in the image pickup state nor in

the recording state, digital data (including video and audio data) picked up and recorded in the past by the image pickup device 100 can be automatically wireless-transmitted to the remote recording device 200 depending upon the communication state of the transmission path.

In the second embodiment, in addition to the configuration of the first embodiment, even if the image pickup device 100 is in the image pickup state, digital data (including video and audio data) presently picked up can be automatically wireless-transmitted to the remote recording device 200 depending upon the communication state of the transmission path. This configuration of the second embodiment will be described below.

The detailed structure and operation of the second embodiment will be described below with reference to the accompanying drawings.

Fig. 6 is a block diagram showing the structure of an image pickup device 500 of the second embodiment. Each component of the image pickup device will be described below. Similar to the image pickup device 100 of the first embodiment, the image pickup device 500 may be a camera integrated VTR or a digital camera.

In Fig. 6, each of an image pickup unit 51, a digital image data processing unit 52, a microphone 53, and a digital audio data processing unit 54 has a

similar function to that of a corresponding one of the image pickup unit 1, digital image data processing unit 2, microphone 3, and digital audio data processing unit 4 respectively shown in Fig. 2.

5 Each of a list information generating unit 55, a recording/reproducing unit 56, a wireless communicating unit 58 (including a detection circuit 63), a recording medium 60, and an operating unit 64 has a similar function to that of a corresponding one of the list
10 information generating unit 5, recording/reproducing unit 6, wireless communicating unit 8 (including the detection circuit 3), recording medium 10, and operating unit 13 respectively shown in Fig. 1.

 A control unit 57 controls the whole operation of
15 the image pickup device 500. The operation of controlling the recording/reproducing unit 56 will be later described with reference to Figs. 7A and 7B. The control unit 57 reads program codes prestored in a memory 61 to control the whole operation of the image
20 pickup device 500.

 A selector 62 selects either pickup data (including digital video and audio data under presently picked up) and corresponding list information output from the image pickup device 51 or record data
25 (including digital video and audio data) and corresponding list information output from the recording medium 60, in accordance with an "image

pickup active signal" supplied from the control unit 57.

5 A wireless communicating unit 58 generates transmission data in accordance with the pickup data and corresponding list information output from the selector 62 (or record data and corresponding list information output from the selector 62), modulates the transmission data, for example, through spread spectrum, and thereafter wireless-transmits it to the
10 remote recording device 200 via an antenna 59. The wireless communicating unit 58 also wireless-transmits the data list in the image pickup device 500 in the form of the transmission data.

15 Although the image pickup device 500 of the second embodiment wireless-transmits transmission data via the antenna 59, the invention is not limited only thereto. For example, the transmission data may be transmitted via an infrared LED or a laser diode by modulating the transmission data with an infrared ray or a laser beam.

20 The structure of the image pickup device 500 of the second embodiment has been described above. The recording device 200 shown in Fig. 2 is used as the recording device corresponding to the image pickup device 500 of the second embodiment.

25 Next, the operation of the image pickup device 500 of the second embodiment will be described in detail.

First, the operation of the image pickup device

500 will be described. If the automatic transmission mode is OFF, the image pickup device 500 operates in the normal operating mode, similar to the first embodiment.

5 Next, the operation to be executed when the automatic transmission mode is ON, will be described. Also in this case, similar to the first embodiment, both the image pickup mode and reproduction mode can be used. However, if an "image pickup request" is issued
10 or if there is no input such as the "image pickup request" during a predetermined time duration, the image pickup device 500 executes the following operation.

 It is checked at a predetermined timing interval
15 whether the wireless communicating unit 58 of the image pickup device 500 and the wireless communicating unit 21 of the recording device 200 are in the normally communicatable range and whether the communication state of the transmission path is good, to thereby
20 judge whether both the wireless communication units can communicate each other.

 First, the case (6) that it is judged as communicatable, will be described. In this case, the image pickup device 100 automatically controls to
25 execute wireless transmission of pickup data or record data.

 In this case, the wireless communicating unit 58

of the image pickup device 500 supplies the control unit 7 with a communication state signal representative of "communicatable". If the image pickup device 500 is in the image pickup state, the control unit 57 supplies the image pickup active signal representative of an "image pickup data" to the selector 62. The selector 62 selects the pickup data output from the image pickup device 51 and outputs it together with the list information.

10 If the image pickup device 500 is not in the image pickup state, the control unit 57 supplies the image pickup active signal representative of a "record data" to the selector 62. The selector 62 selects the record data output from the recording medium 60, and outputs
15 it together with the list information. The pickup data (or record data) supplied from the selector 62 is modulated (e.g., spread-spectrum modulation) by the wireless communicating unit 58 and wireless-transmitted to the recording device 200 via the antenna 59.

20 Next, the case (7) that it is judged that good wireless communication cannot be performed because of relocation of the image pickup device 500 or recording device 200 or obstacles on the transmission path, will be described. In this case, the image pickup device
25 500 automatically controls not to execute wireless transmission of record data.

In this case, the wireless communicating unit 58

of the image pickup device 500 supplies the control unit 57 with a communication state signal representative of "not communicatable". If the image pickup device 500 is in the image pickup state, the wireless communicating unit 58 intercepts the wireless transmission of the pickup data, and the remaining pickup data is stored in the recording medium 60. The pickup data stored in the recording medium 60 is the pickup data immediately before the wireless transmission is intercepted. Therefore, the index number of the list information corresponding to the pickup data immediately before the interception, is set to the field 809 of the list information corresponding to the pickup data to be stored in the recording medium 60. In this manner, a link can be set between the pickup data before and after the wireless transmission interception. Therefore, even if the reception state during the image pickup state is changed and the consecutive pickup data is recorded separately in the image pickup device 500 and recording device 200, the recording device 200 can record and manage a plurality piece of pickup data with time sequential relation being retained, by using the list information.

If the image pickup device 500 is not in the image pickup state, under the control of the control unit 57, the recording/reproducing unit 56 stops reproduction of the record data. The record data whose reproduction

was stopped intermediately is reproduced again from the start thereof when the communication state becomes again communicatable.

Similarly, the wireless communicating unit 21 of
5 the recording device 200 transmits the communication
state signal representative of "not communicatable" to
the control unit 24. If the pickup image of the image
pickup device 500 is being recorded, the control unit
24 stops the recording operation of the
10 recording/reproducing unit 25 and controls the
recording/reproducing unit 25 to record the pickup
image. If the record data of the image pickup device
500 is being recorded, the control unit 24 stops the
recording operation of the recording/reproducing unit
15 25 and controls the recording/reproducing unit 25 to
delete the record data and prepare for recording the
record data from the start thereof.

Next, the case (8) that the communication states
changes from the bad state to the good state and the
20 communication is possible between the image pickup
device 500 and recording device 200, will be described.
In this case, the image pickup device 500 automatically
resumes wireless transmission of either the pickup data
or the record data.

25 In this case, the wireless communicating unit 58
of the image pickup device 200 supplies the
communication state signal representative of

"communication recovery" to the control unit 57. If the image pickup device 500 is in the image pickup state, the control unit 57 supplies the image pickup active signal representative of the "image pickup data" to the selector 62. The selector 62 selects the pickup data output from the image pickup unit 51, and outputs it together with the list information. The field 809 of this list information is set with the index number of the list information corresponding to the pickup data immediately before resuming the communication.

If the image pickup device 500 is not in the image pickup state, the control unit 57 supplies the image pickup active signal representative of the "record data" to the selector 62. The selector 62 selects the record data output from the recording medium 60, and outputs it together with the list information. Then, the recording/reproducing unit 56 resumes reproducing the record data in the unit of data corresponding to the list information. Therefore, if reproducing data corresponding to the list information is stopped intermediately, the record data is reproduced again from the start thereof.

Similarly, the wireless communicating unit 21 of the recording device 200 supplies the communication state signal representative of the "communication recovery" to the control unit 24. Under the control of the control unit 24, the recording/reproducing unit 25

resumes recording the pickup data or record data.

The processes of the cases (6) to (8) are executed until all record data in the recording medium 10 is recorded in the recording medium 27 after the image pickup state is terminated. After all the record data is transmitted, the image pickup device 500 executes wireless transmission of the data end signal to the recording device 200. After the data end signal is received, the recording device 200 stops its recording operation. As a user records new picked-up images, the above-described processes automatically start.

Figs. 7A and 7B are flow charts illustrating the operation sequence to be executed by the image pickup device 500 of the second embodiment. The control unit 57 of the image pickup device 500 controls the whole operation of the image pickup device 500 in accordance with the flow charts of Figs. 7A and 7B. Program codes for realizing the flow charts of Figs. 7A and 7B are being stored in the memory 61.

At Step S701 the control unit 5 judges whether the automatic transmission mode is ON. If not, the control unit 57 enters the normal operating mode (S702).

If the automatic transmission mode is ON, the control unit 57 judges at Step S703 whether there is an image pickup request from a user. If there is an image pickup request, the control unit 57 judges at Step S704 from the communication state signal output from the

wireless communicating unit 58 whether the communication state is good.

If it is judged that the communication state is good, the control unit 57 judges at Step S705 whether the recording/reproducing unit 56 is in the recording state. If in the recording state, at Step S706 the control unit 57 outputs a recording/reproducing control signal and at Step S706 stops the recording operation of the recording/reproducing unit 56. At Step S707 the control unit 57 sets the image pickup active signal to the "image pickup mode". The selector 62 selects the digital video and audio data and corresponding list information presently picked up, and supplies them to the wireless communicating unit 21. The wireless communicating unit 21 executes wireless transmission of the transmission data constituted of the digital video and audio data and corresponding list information.

Next, the case that it is judged at Step S704 that the communication state is not good, will be described. In this case, at Step S708 the control unit 57 outputs the recording/reproducing control signal to make the recording/reproducing unit 56 start the recording operation, to thereafter return to the control Step S703.

Next, the case that it is judged that there is no image pickup request, will be described. In this case, at Step S709 the control unit 7 judges whether there is

no input from a user during a predetermined time duration.

5 If there is no input from the user during the predetermined time duration, at Step S710 the control unit 57 judges from the communication state signal output from the wireless communicating unit 58 whether the communication state is communicatable. If it is judged as communicatable, the control unit 57 executes at Step S711 wireless transmission of the data list stored in the recording medium 60 to the recording device 200. In this case, the list information already set with the transmission end flag is not transmitted. The recording device 200 compares the received data list with the data list managed by the recording device 15 200. If there is list information having the coincident contents, the reproduction skipping flag or data deleting flag is set to the list information. After the process is executed for all list information in the data list, the recording device 200 returns the data list back to the image pickup device 500.

In accordance with the data list returned from the recording device 200, the image pickup device 500 judges whether wireless transmission of the record data corresponding to list information can be executed. 25 Reproducing the record data corresponding to the list information with the set reproduction skipping flag is skipped, and the transmission end flag is set to the

field 806 of the list information (S712, S713).

For the list information with the set data deleting flag, the list information and the record data corresponding to the list information are deleted
5 (S714, S715).

For the list information set with neither the reproduction skipping flag nor the data deleting flag, wireless transmission of the record data corresponding to the list information to the recording device 200 is
10 executed. If the recording device 200 confirms that the record data is normally received, the control unit 57 sets the transmission end flag to the field 806 of the list information (or deletes the record data), and executes the process for the next list information. If
15 the recording device 200 cannot confirm that the record data is normally received, the control unit 57 executes again wireless transmission of the record data.

At Step S717, the control unit 57 repeats the processes at Step S710 and succeeding Steps until the
20 transmission end flag is set to the fields 806 of all list information in the data list (or until all record data is deleted). After transmission of all record data is completed, the image pickup device 500 transmits a data end signal to the recording device 200
25 to thereafter return to Step S701.

Next, the case that it is judged at Step S710 that the communication state between the image pickup device

500 and recording device 200 is communicatable, will be described. In this case, the control unit 57 judges at Step S718 whether there is record data under wireless transmission. If not, the control unit 57 returns to the control Step S710.

If there is record data under wireless transmission, at Step S719 the control unit 57 stops the wireless transmission of the record data and sets a reproduction pointer of the recording/reproducing unit 56 to the start of the record data.

The flow chart illustrating the operation sequence of the recording device 200 of the second embodiment is similar to that shown in Figs. 4A and 4B, and so the description thereof is omitted.

As described above, in the second embodiment, each image pickup device 500 and recording device 200 are provided with the automatic transmission mode. Therefore, the image communication system is realized which can automatically execute wireless transmission of digital video and audio data presently picked up by the image pickup device 500, or the digital video and audio data picked up in the past by the image pickup device 500, to the remote recording device 200, if the distance between the image pickup device 500 and recording unit 200 is in a normally communicatable range and if the communication state of the transmission path is good. Furthermore, this system

can automatically stop data transmission if each device is not in the normally communicatable range or if the communication state of the transmission path is not good, and after the communication state becomes good, the system automatically resumes the data transmission. In this case, even if the digital images are recorded separately at the image pickup device 500 and recording device 200, it is possible to automatically manage the digital images in correspondence with the list information.

With this configuration, it is possible to automatically store digital video and audio data picked up by the image pickup device 500 in the recording medium of the remote recording device 200, without particular attention of a user and a complicated work, similar to the first embodiment. Further, since the data transmission is automatically stopped if the communication state is not good, transmission errors and data loss can be minimized and the data can be recorded and stored reliably at the remote recording device 200.

Also in the second embodiment, similar to the first embodiment, reproduction of digital video and audio data already recorded in the recording device 200 can be automatically skipped or deleted. With this configuration, it is possible to prevent the same data from being duplicately reproduced and transmitted. The

data transmission can therefore be executed efficiently. If the data is automatically deleted, the recording medium of the image pickup device 500 can therefore be used efficiently.

5 Also in the second embodiment, similar to the first embodiment, it is possible to convert digital video data transmitted from the image pickup device 500 into a predetermined data format and to store it in the recording device 200. With this configuration, a work
10 load of storage and maintenance of digital video data can be reduced and a work load of edition after recording can be reduced.

 Furthermore, the recording device 200 of the second embodiment can record, if necessary, the digital
15 image data automatically transferred from the image pickup device 500 in correspondence with the digital image data recorded in the past. With this configuration, a work load of storage and maintenance of digital video data in the recording medium can be
20 reduced and a work load of edition after recording can be reduced.

 The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof.

25 Therefore, the above-mentioned embodiments are merely examples in all respects, and must not be construed to limit the invention.

The scope of the present invention is defined by the scope of the appended claims, and is not limited at all by the specific descriptions of this specification. Furthermore, all the modifications and changes
5 belonging to equivalents of the claims are considered to fall within the scope of the present invention.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
22

WHAT IS CLAIMED IS:

1. An image communication apparatus, comprising:

(a) image pickup means for generating digital image;

5 (b) recording means for recording the digital image and list information corresponding to the digital image, in a recording medium; and

(c) transmitting means for executing wireless transmission of the digital image and list information recorded in the recording medium to an external apparatus,

10 wherein said image communication apparatus has a mode of automatically executing wireless transmission of the digital image and list information recorded in the recording medium, in accordance with a communication state with the external apparatus.

2. An image communication apparatus according to claim 1, wherein:

20 the mode automatically executes wireless transmission of the digital image and list information if the communication state is good.

3. An image communication apparatus according to claim 1, wherein:

25 the mode automatically executes wireless transmission of the digital image and list information

if said image pickup means is not in an image pickup state.

4. An image communication apparatus according to
5 claim 1, wherein:

said image communication apparatus skips reproduction of digital image recorded by the external apparatus.

10 5. An image communication apparatus according to claim 1, wherein:

the image communication apparatus deletes digital image recorded by the external apparatus.

15 6. An image communication apparatus according to claim 1, wherein:

said image communication apparatus controls the mode in accordance with a program stored in the recording medium.

20 7. An image communication apparatus according to claim 1, wherein:

the list information is generated for each of the digital image.

25 8. An image communication apparatus according to claim 1, wherein:

the list information includes any one of an image pickup date and time and a title.

9. An image communication apparatus according to
5 claim 1, wherein:

the digital image includes any one of a moving image and a still image.

10. An image communication apparatus according to
10 claim 1, wherein:

said transmitting means has a function of spread spectrum communication method.

11. An image communication apparatus according to
15 claim 1, wherein:

said image communication apparatus is a camera integrated digital video recorder or a digital camera.

12. An image communication apparatus, comprising:

20 (a) receiving means for receiving list information supplied from an external apparatus through wireless transmission;

(b) recording means for recording the list information;

25 (c) comparing means for comparing the list information with other list information recorded by said recording means; and

(d) control means for remotely controlling image information corresponding to the list information in accordance with a comparison result by said comparing means.

5

13. An image communication apparatus according to claim 12, wherein:

said image communication apparatus requests not to reproduce the image information corresponding to the
10 list information, according to the comparison result by said comparing means.

14. An image communication apparatus according to claim 12, wherein:

15 said image communication apparatus requests to delete the image information corresponding to the list information, according to the comparison result by said comparing means.

20 15. An image communication apparatus according to claim 12, wherein:

the list information includes any one of an image pickup date and time and a title.

25 16. An image communication apparatus according to claim 12, wherein:

the image information includes any one of a moving

image and a still image.

17. An image communication apparatus according to claim 12, wherein:

5 said receiving means has a function of spread spectrum communication method.

18. An image communication apparatus according to claim 12, wherein:

10 said image communication apparatus is a storage device.

19. An image communication method, comprising steps of:

15 (a) generating digital image by using an image pickup unit;

 (b) recording the digital image and list information corresponding to the digital image, in a recording medium; and

20 (c) controlling a mode of automatically executing wireless transmission of the digital image and list information recorded in the recording medium to an external apparatus, in accordance with a communication state with the external apparatus.

25

20. An image communication method, comprising steps of:

 (a) receiving list information supplied from an

external apparatus through wireless transmission;

(b) recording the list information;

(c) comparing the list information with other list information recorded at said recording step; and

5 (d) remotely controlling image information corresponding to the list information in accordance with a comparison result at said comparing step.

21. An image communication system, comprising:

10 (a) an image generating apparatus for recording digital image and list information corresponding to the digital image generated by an image pickup unit, in a first recording unit; and

(b) a recording apparatus for recording the
15 digital image supplied from said image generating apparatus through wireless transmission, in a second recording medium,

wherein:

said image generating apparatus is provided with a
20 first mode of automatically executing wireless transmission of the list information recorded in the first recording medium, according to a communication state with said recording apparatus; and

said recording apparatus is provided with a second
25 mode of receiving the list information supplied from said image generating apparatus through wireless transmission and remotely controlling the digital image corresponding to the list information.

ABSTRACT OF THE DISCLOSURE

Each image pickup device generates digital image from the optical image of an object, generates list information corresponding to the digital image, and
5 records the digital image in a recording medium in correspondence with the list information. Each image pickup device reads the digital image and list information recorded in the recording medium and automatically executes wireless transmission of the
10 digital image and list information to a recording device, in accordance with the communication state between the image pickup device and recording device. The recording device records the received digital image and list information in a recording medium of a large
15 capacity. Each image pickup device automatically skips or deletes the digital image already recorded in the recording device. In this manner, digital image of the image pickup device can be efficiently and reliably stored and managed at the recording device located at a
20 remote site.

FIG. 1

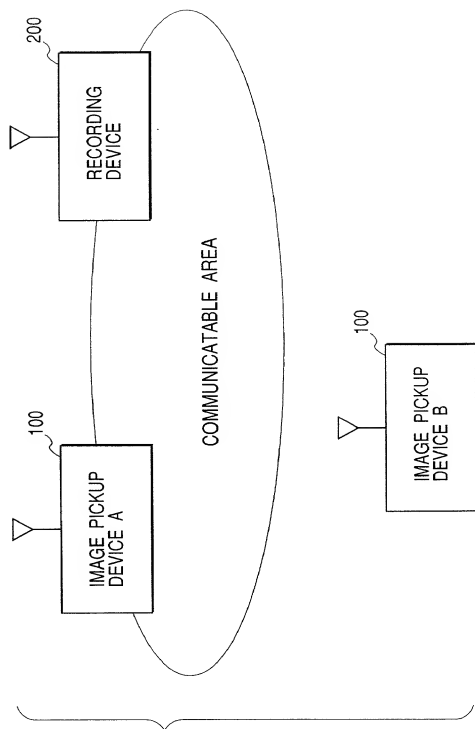


FIG. 2

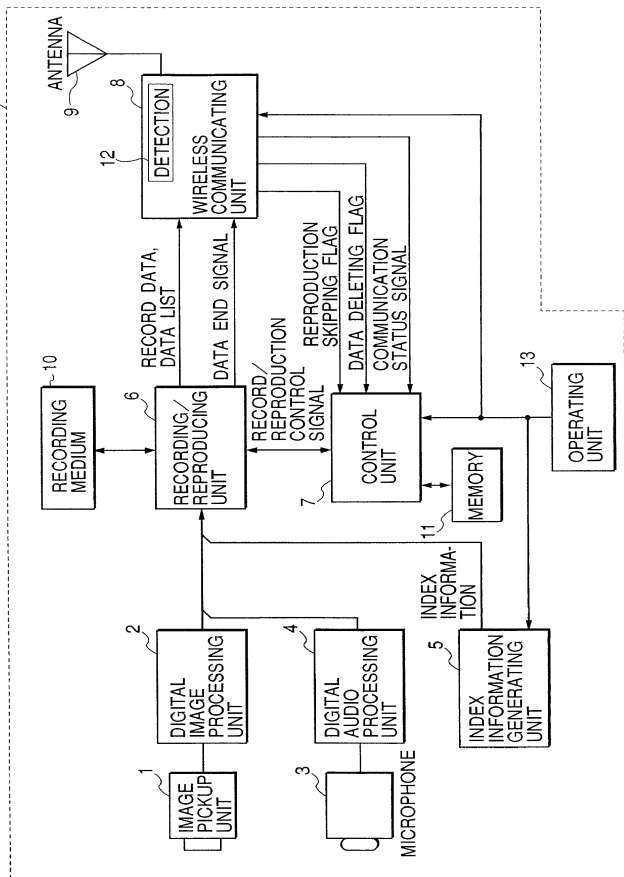


FIG. 3

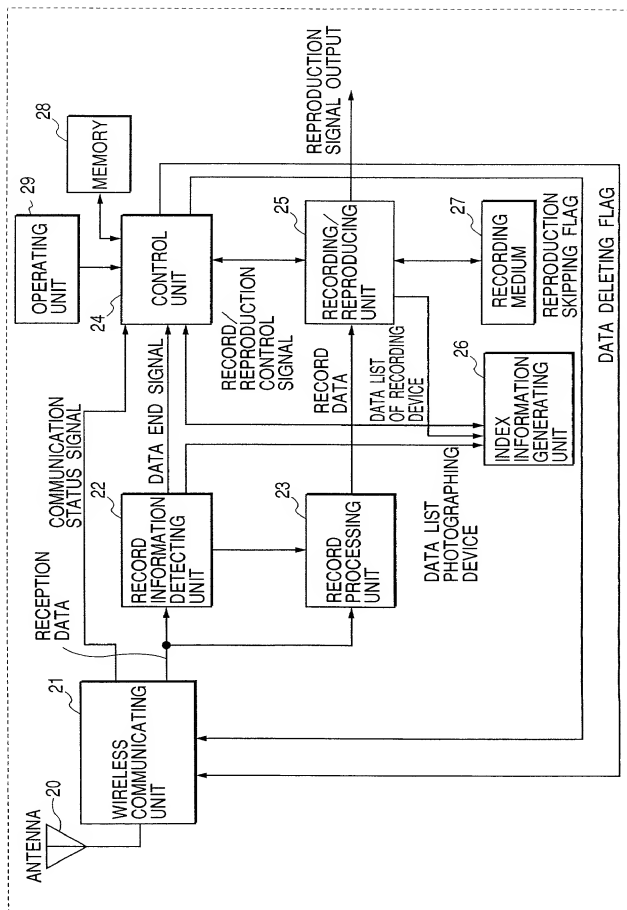


FIG. 4

FIG. 4A

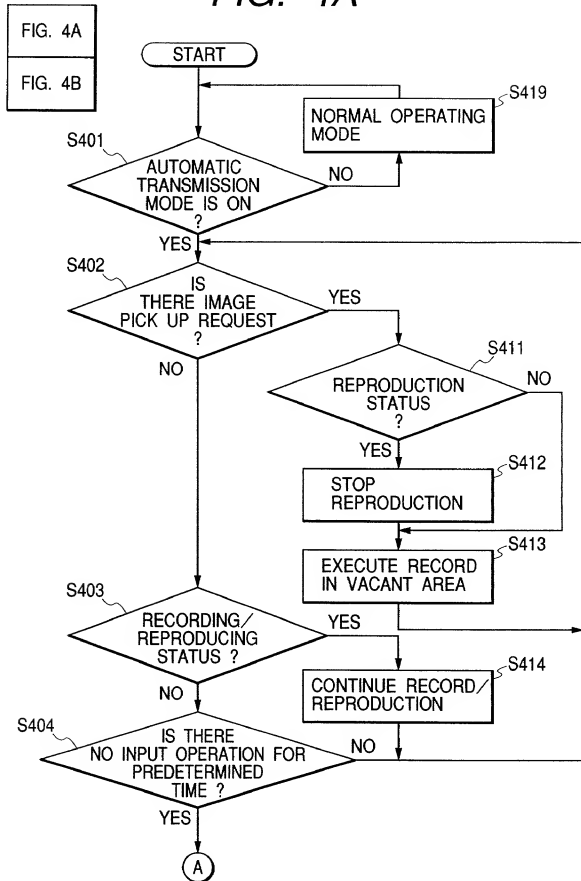


FIG. 4B

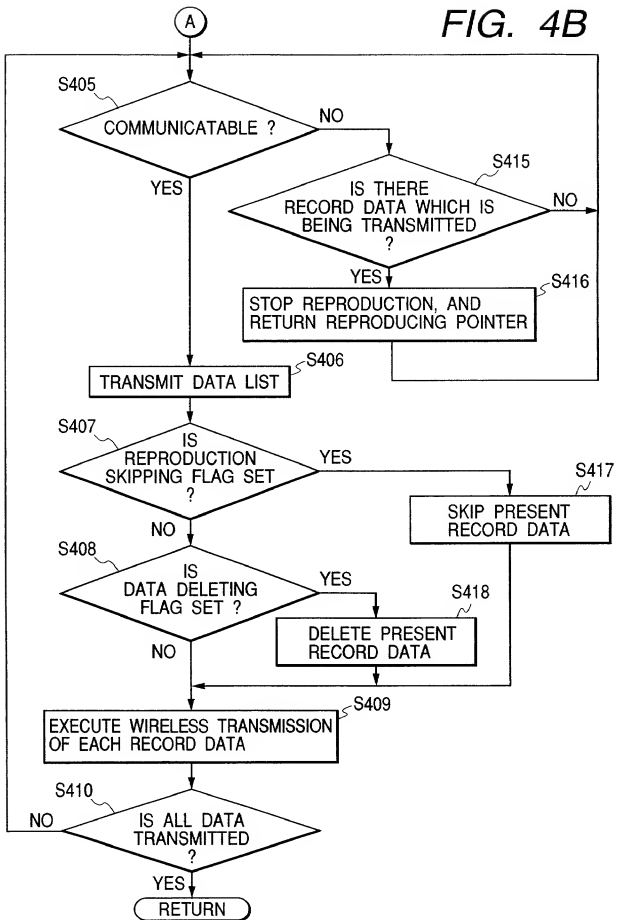


FIG. 5

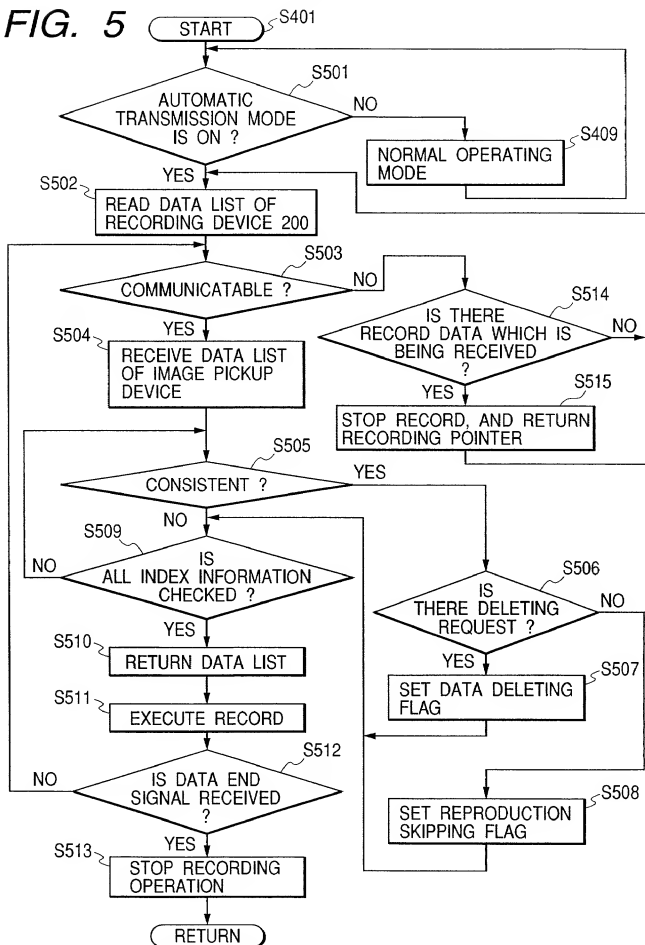


FIG. 6

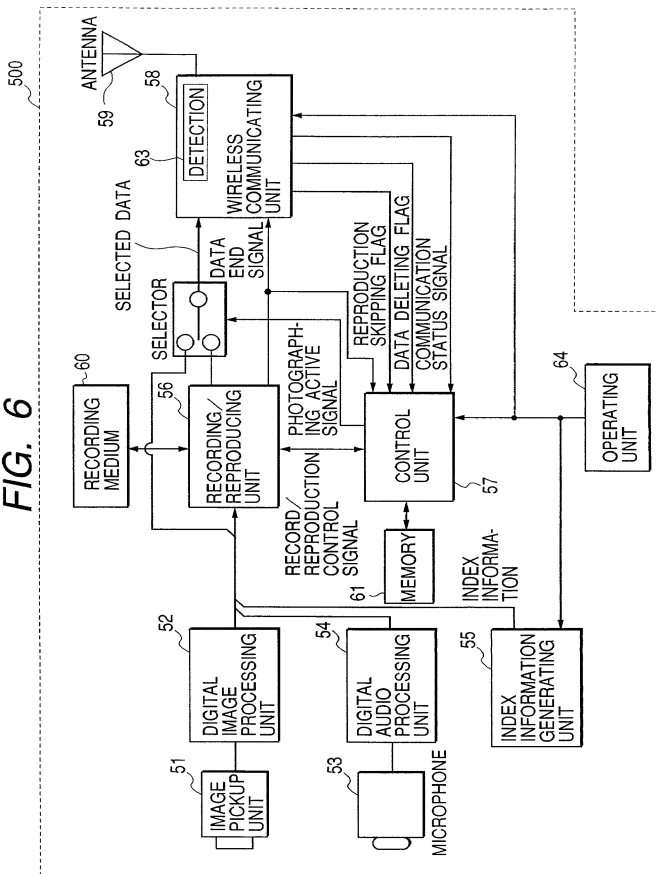


FIG. 7

FIG. 7A

FIG. 7B

FIG. 7A


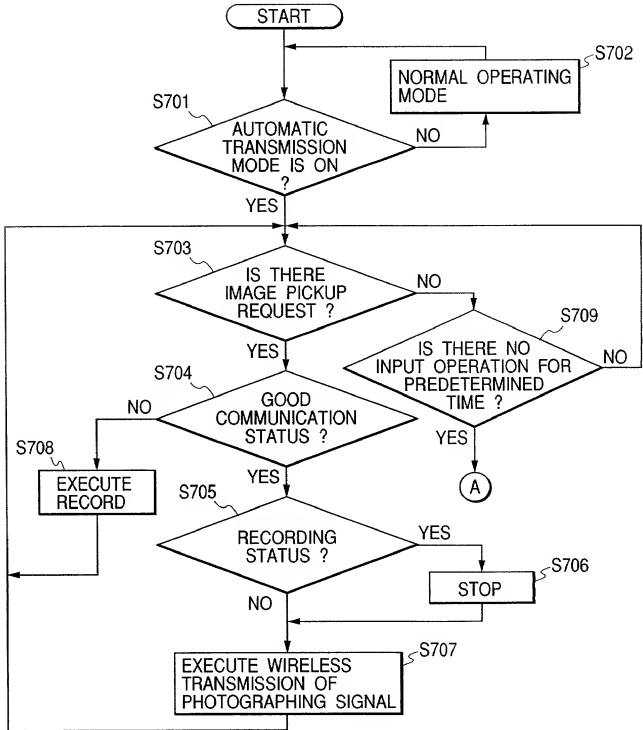


FIG. 7B

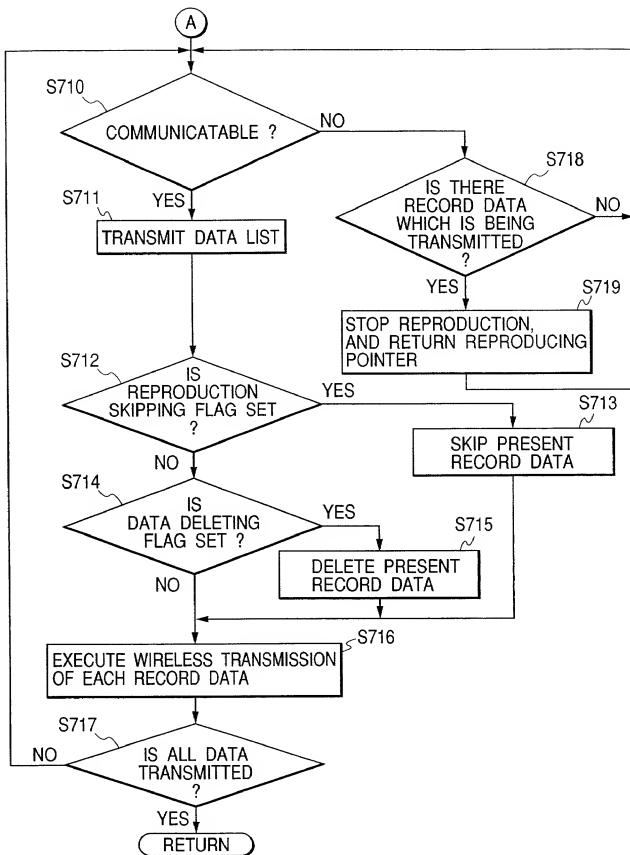

0000000000000000

FIG. 8

INDEX NUMBER	TITLE	PREPARED TIME	IMAGE FILE NAME	AUDIO FILE NAME	TRANSMISSION END FLAG	REPRODUCTION SKIPPING FLAG	DATA DELETING FLAG	LINK
INDEX 1	AAAA	AAA	AAA.MPG	—				
INDEX 2	BBBB	BBB	BBB.JPG	BBB.WAV				
INDEX 3	CCCC	CCC	CCC.JPG	—				
INDEX 4	DDDD	DDD	DDD.MPG	—				
INDEX 5	EEEE	EEE	EEE.MPG	—				INDEX 4
INDEX 6	FFFF	FFF	FFF.MPG					INDEX 5

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled _____

IMAGE COMMUNICATION APPARATUS, METHOD AND SYSTEM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States
Application No. or PCT International Application No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended
by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b), of any foreign application(s) for patent or inventor's
certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below
and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date
before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	11-004070	January 11, 1999	Yes
Japan	2000-001787	January 7, 2000	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application
designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the
prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty
to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the
prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
N/A		

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and
to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address
associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief
are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are
punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements
may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor HIDETOSHI WADA

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 4-21-D705, Nokendai 4-chome, Kanazawa-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 2)

Full Name of Second Joint Inventor, if any TERUO HIEDA

Second Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 2108-1-409, Kita Hassaku-cho, Midori-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any NORIHIRO KAWAHARA

Third Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 15-8-407, Shirahatadai 1-chome, Miyamae-ku, Kawasaki-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fourth Joint Inventor, if any YOSHIKATSU NAKAYAMA

Fourth Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 16-4-A102, Shiboku 2-chome, Miyamae-ku, Kawasaki-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan